



Pulse/Delay Generator

(Product ID: PSG-3)

The PSG-3 is a four-channel pulse/delay generator. It can be used as a master clock for timing and delay control. It can be externally triggered and/or gated by an external event. Pulse width, delay, repetition rate, and other timing parameters can be controlled by one of two available interfaces.



Capability	Two dual-channel independently programmable pulse generators	Input trigger thresholding
Features	Four high-current TTL outputs	Divide-by-N circuit
Control	Multiple PSG-3s can be cascaded to increase the number of channels	Easy to use software interface or TCP/IP API commands for integration
Networking	Multiple devices can be connected and simultaneously controlled over a network	10/100 Mbps Ethernet interface
Versatility	Multiple timing bases (s, ms, μ s, ns)	BNC inhibit input (TTL high level) to allow the PSG-3 to be gated by an external source

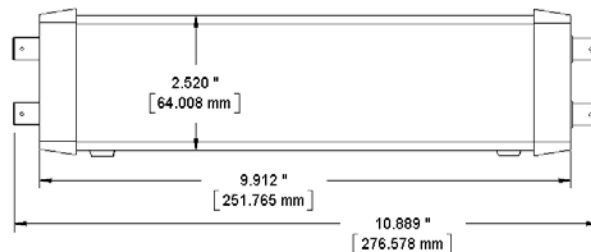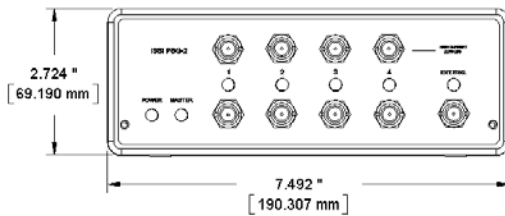

The PSG-3 replaces the PSG-2 in the ISSI product line.



PSG-3 Specifications

I/O Configuration	
TTL Outputs	4 standard, 4 high-current (mirroring standard)
Inputs	1 Ext. Trig. Input 1 Inhibit
Divide-by-N	1 input, 1 output

Internal Generator	
Repetition Rate	0.100 Hz to 25.00 MHz
Resolution	20 nanoseconds
Burst Mode	1 – 131,072 pulses
Output Modes	Single-shot, burst, continuous
Master Clock	50 MHz, +/- 30 ppm Dual Clocks allow for independent repetition rates from one PSG-3
Timing Clock Settings	20-, 40-, 80-, 160-ns

Programming	
Control Mode	Internally triggered, externally triggered and/or gated. Generator 1 & 2 can be independently set to internally or externally triggered.
Multiplex	None
Divide-by-N	2-255

Trigger Input	
Threshold	0.05 - 5.0 V
Max Input Voltage	7.0 V
Max Input Frequency	5 MHz
Input Impedance	>1 M Ω

TTL Outputs	
Output Impedance	50 Ω
Output Voltage	@ 50 Ω : 2.5 V (Standard outputs) @ 1 K Ω : 4.0 V (High-current outputs)
Pulse Width	20 ns to 10.736 s
Delay Width	20 ns to 10.736 s
Rise Time	4 ns
Fall Time	4 ns

Communication Interfaces	
Ethernet	1 input, 10/100 Mbps
USB 2.0	1 input, type B
RJ-11	2, sync in and sync out (Master/slave config.)

Power Input	
External Power Input	85-264 VAC, 50-60 Hz

Export	
ECCN	EAR99

Innovative Scientific Solutions, Inc.
7610 McEwen Road, Dayton, OH 45459
Phone (937) 630-3012 Fax (937) 630-3015

email: issi-sales@innssi.com
web: www.psp-tsp.com

Any and all underlying information and technology contained in this document may be subject to U.S. export controls, including the Export Administration Act (50 U.S.C. Appx. §§ 2401 et seq.) and the Export Administration Regulations ("EAR", 50 C.F.R. Parts 730-774), and may be subject to export or import regulations in other countries. You are responsible for complying with all trade regulations and laws both foreign and domestic. Except as authorized by law or distributor agreement with ISSI, you agree and warrant not to export or re-export the information to any country, or to any person, entity, or end-user subject to U.S. export controls, including without limitation persons or entities listed on the U.S. Department of Commerce Bureau of Export Administration's Denied Parties List and the U.S. Department of Treasury's Specially Designated Nationals. You further represent and warrant that no U.S. federal agency has suspended, revoked, or denied your export privileges.